

Omnicare

Thermostatic Electric Shower

Product Codes

Omnicare 8.5kW

TEOMN81

Installation

- Multiple pipe and cable entry points, a generous footprint and a fixing hole kit, the Omnicare is designed with ease of replacement in mind
- Suitable for connection with an analogue pump

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button
- Power on illumination along with audible feedback allows ease of use for all users
- Easy to use low resistance centralised temperature control
- Constantly regulating water temperature within +/- 1°C, (BEAB Care standard)
- Flexible accessories – Comes with extended 680mm riser rail kit with adjustable fixing centres and extended 1.5m anti twist shower hose
- Easy clean inclusive 5 spray pattern showerhead with removable spray plate



SAFETY CRITICAL
TRITON ACCESSORY



Omnicare

Thermostatic Electric Shower

Shower

Temperature stability	Thermostatic +/-1°C with Tri-Therm™
Power ratings	8.5kW (at 240V)
Finish	White
Adjustable max temperature	41°C, 43°C or Max
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	15mm swivel inlet (up/down)
Terminal block	16mm max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	Minimum maintained pressure: 0.5 bar Minimum maintained pressure for BEAB Care: 1.0 bar
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom (15mm pipework & 38mm cable trunking)
Other installation aid(s)	Wall mounting template

Diagram Key:

 Water Entry Points


 Cable Entry Points

Dimensions:

H: 387mm

W: 240mm

D: 117mm

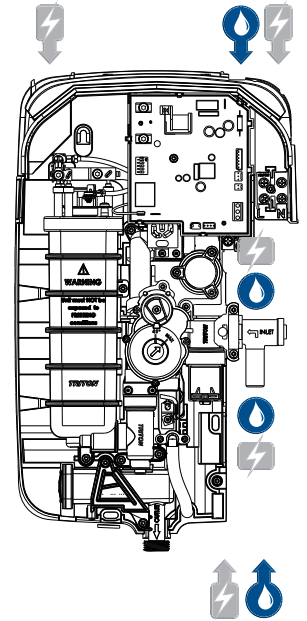

Riser Rail Kit

Standard version

Length	680mm
Diameter	20.6mm
Material	Stainless Steel
Finish	Polished
Hose	1.5m Anti-twist Chrome

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period

Model Number: OMNICARE 8.5kW - TEOMN81
RRP \$1,495 (Incl GST)



Omnicare Kit
GAUF1



1.5m Anti-twist Hose - Chrome
REHOSE150C



Inclusive Showerhead
(5 Spray Pattern)
TSHECAREWHT

Contact our customer service at Parex Industries Limited:

Call: 0800 200 510 **Email:** info.parex@whirlpool.com **Web:** www.tritonshowers.co.nz

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.
(2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.
(3) The shower will operate down to 0.5 bar at reduced flow rates.