


Electric Showers

The Perfect Solution for a Remote Shower!

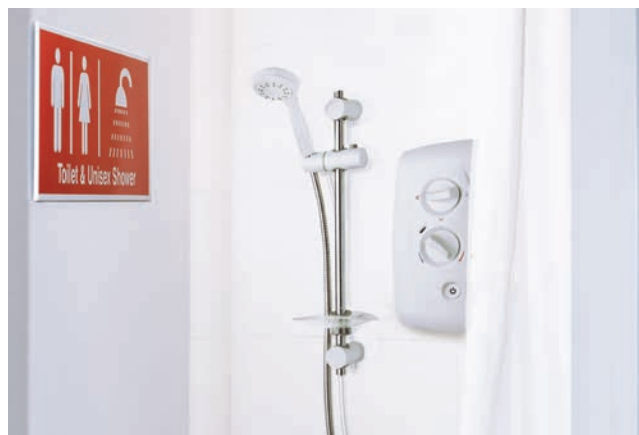


Instantaneous hot water showers.
Ideal for baches, offices & remote bathrooms.
No hot water cylinder required.

Smart Remote Solutions

Installing a continuous flow electric shower is the perfect solution for remote bathrooms and situations where there can be unpredictable demands for hot water, making them ideal for baches, offices and sports clubs.

With Triton electric showers, water is heated instantly on demand, so you'll never run out of hot water and you'll only pay for what hot water you use.

There's no need for a hot water cylinder and long runs of pipe which can waste water and result in heat losses. Therefore there is no stored water, saving on precious space and improving the affordability even further.

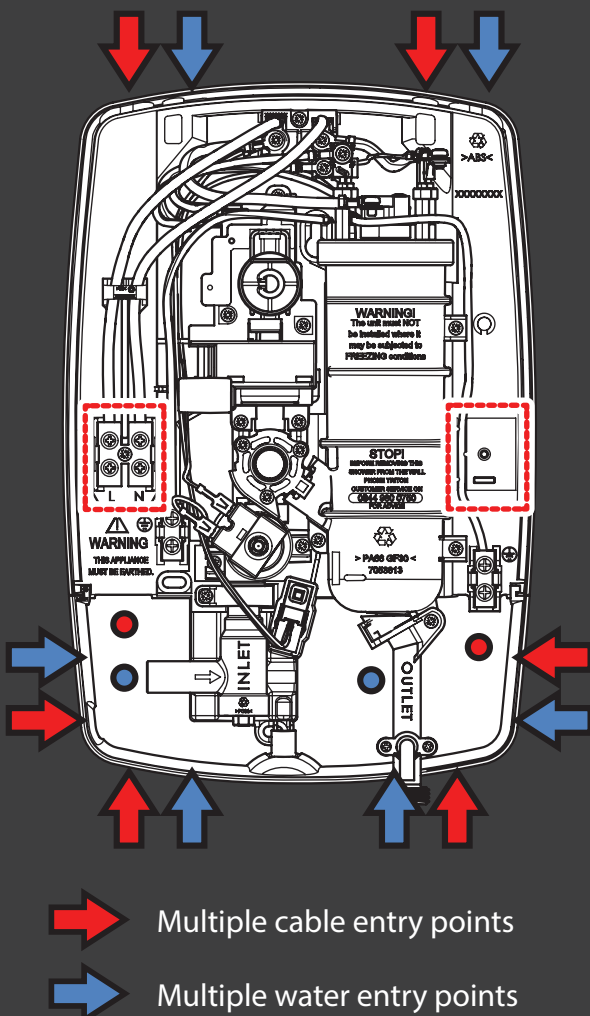

Smart Installation

The T80Z Electric heating elements located in the main unit operate at a constant rate at your chosen power setting. The rate of the water passing through the heater determines the water temperature. The slower the flow the hotter the water becomes; the faster the flow, the cooler the water.

During winter the mains water supply will be cooler than in summer, so the flow rate will vary between seasons at any one temperature setting.

Therefore at different times of the year you may have to adjust the position of the temperature control/dial to maintain your desired water temperature.

T80Z Fast-Fit Electric Shower

The T80Z Fast-Fit has multiple cable and water entry points located to the left and right side of the unit ensure easy fitting.

- Ideal size and shape for replacement installations
- Rub clean shower head with five different spray patterns
- Stylish riser rail kit with adjustable fixing brackets
- Push button Start/ Stop to select your favourite shower setting every time
- Swing-Fit™ - Terminal for left and right cabling
- Swivel-Fit™ - A 180° fully reversible swivel water inlet that accommodates water connections from either the left or right hand side of the unit to aid installation



Installation Guidelines

Only connect unit to a 230v - 240v AC supply.



The electrical supply must be adequate for the loading of unit and existing circuit.

The shower must be connected to its own independent electrical circuit

An isolation valve must be fitted in a convenient position in the supply pipe to allow the shower to be serviced.

Important

We recommend all TRITON shower installations be carried out by qualified tradespeople, and in accordance with the NZ Building code, trade regulations and the TRITON installation guide.

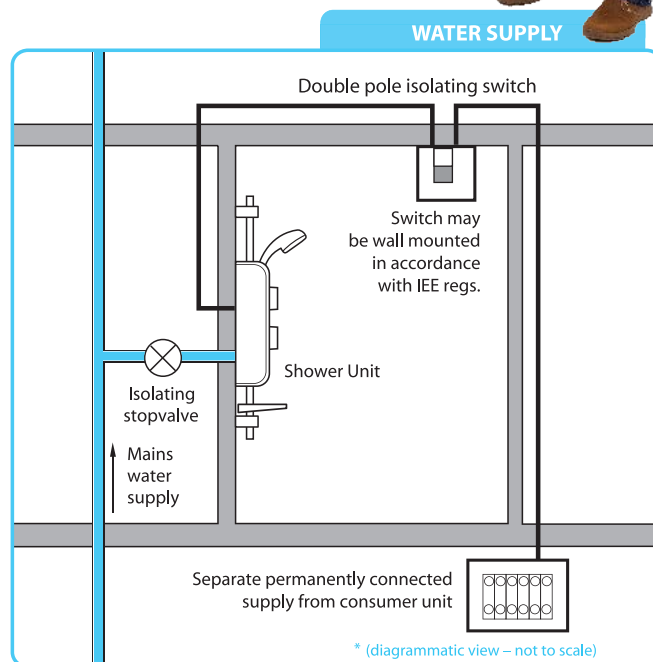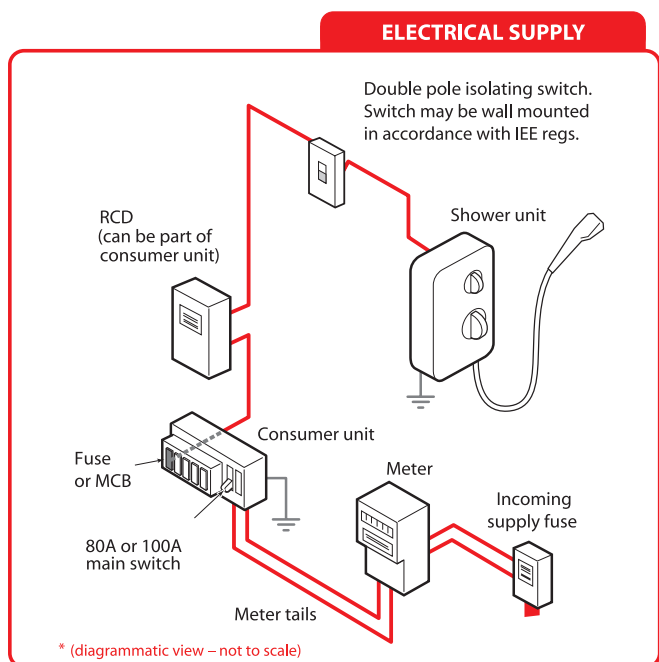

T80Z Fast-Fit		
Product Code	T80 Fast Fit W	T80 Fast Fit C
Finish	White	Chrome
Temperature Control	Stabilised	
Power Ratings at 230v	8.7kW 38amps - IPX4 rated	
Inlet Connection	15mm compression	
Water Entry Points	Top, bottom, side bottom, back (left side of unit) Top, bottom, side bottom, back (right side of unit)	
Cable Entry Points	Top, bottom, back (left or right side of unit) Bottom, back (right hand side of unit)	
Outlet Connection	1/2" BSP	
Plumbing System	Cold water only	
Max Inlet Temp	28°C	
Min Inlet Temp	2°C	
Minimum Running Pressure/Flow for full performance*	1.0 Bar @ 8 l/min	
Maximum Static Pressure	10 Bar	
Surface Mounted Only	✓	
Approvals, Complies with	AS/NZS60335.2.35, EMC BEAB, CE, BSI Kitemark	
Warranty	2 years domestic	

